



INSTALLATION INSTRUCTIONS

BOBRICK PART NUMBER 830-215 LOW SOAP INDICATOR (LSI) LIGHT

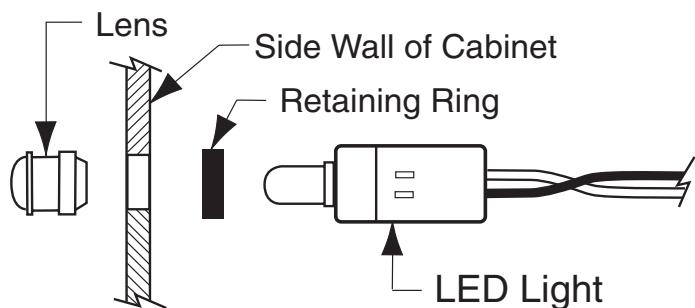


FIGURE 1

LSI Retrofit Kit (830-215)

- "C" Battery
- Clear Lens
- Retaining Ring

Function

When Low Soap Indicator Light flashes, Soap Cartridge must be replaced to allow for uninterrupted flow of soap through SureFlo™ Soap System.

Instructions

1. Attach battery clip to "C" battery and place in holder (located in front of the Bladder Tray assembly).
2. Insert clear lens through visible, side wall of the cabinet (**See Figure 1**).
3. Attach retaining ring to lens.
4. Attach LED light to lens.

Note: For a new Cabinet Installation, the LSI light will continue to flash for up to 3 hours until the bladder is full of soap.



© 2006 by Bobrick Washroom Equipment, Inc.
Form No. 830-229 Revised 7/06 Printed in U.S.A.

In the U.S.A.: BOBRICK WASHROOM EQUIPMENT, INC.

200 Commerce Drive, Clifton Park, New York 12065-1350 • Tel: (518) 877-7444 • FAX: 518-877-5029
11611 Hart Street, North Hollywood, California 91605-5882 • Tel: (818) 982-9600 • FAX: 818-503-1102
100 Bobrick Drive, Jackson, Tennessee 38301-5625 • Tel: (731) 424-7000 • FAX: 731-424-7800

In Canada: BOBRICK WASHROOM EQUIPMENT COMPANY

45 Rolark Drive, Scarborough, Ontario M1R 3B1 • Tel: (416) 298-1611 • FAX: 416-298-6351