

# MODEL ZW221E - One Way Altitude Level Control Valve with Solenoid Shut-Off valve



## Control Valve Order Form

Customer: \_\_\_\_\_ Date: \_\_\_\_\_

Contact: \_\_\_\_\_ Email: \_\_\_\_\_

Telephone/Fax: \_\_\_\_\_ Ref. P. O. \_\_\_\_\_

### Required Valve Information

All returns are subject to a restocking/refurbishing fee. Contact Customer Care for details on return policies.

Quantity: \_\_\_\_\_

Size: (Check one)  1-1/4"  1-1/2"  2"  2-1/2"  3"  4"  6"  8"  10"  12"  14"  16"

#### Function Options:

- Check all that apply
- "D" Option\* - Delayed drawdown level before valve reopens (3 - 20ft)
  - "C" Option\* - Check Valve with Isolation Valve
  - Standard - Closing Speed Control
  - "O" Option\* - Opening Speed Control (Standard on 4" or smaller)

Valve body is ductile iron, epoxy coated

#### Body Options:

- Check one
- Standard - Full Port Globe Body
  - "A" Option - Angle Style Body (1-1/4" - 10")
  - "R" Option - Reduced Port Body (3" - 10" Flanged only)

#### End Connections:


- Check one
- Standard - ANSI Class 150 Flanges (1-1/2" - 16")
  - "G" Option - IPS Grooved (1-1/2" - 10")
  - "TH" Option - NPT Threaded (1-1/4" - 3")
  - "Y" Option\* - ANSI Class 300 Flanges (1-1/2" - 16")

#### Main Valve Options:

- Standard - Stainless Steel Seat, Seal Ring Retainer, and Stem Guide
- Standard - Visual Position Indicator

#### Pilot Options:

- Standard - Isolation Valves, Inlet and Pressure Gauges, and "Wye" Type Strainer

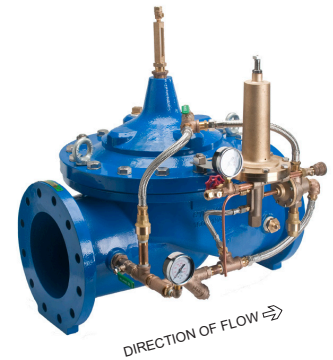

- Must check one
- "L1" Option - 5'-55' Adjustment Range
  - "L2" Option - 45'-85' Adjustment Range
  - "L3" Option - 75'-230' Adjustment Range

Enter Desired Setting: \_\_\_\_\_ Ft

- Check all that apply
- "ST" Option\* - Stainless Steel Tubing (replaces Stainless Steel Braided Hoses)
  - Standard - Stainless Steel Braided Hoses and Brass Fittings

- Check one
- "NC" Option - Normally Closed (energize to open) Main Valve, 120vac Solenoid
  - "NO" Option - Normally Open (energize to close) Main Valve, 120vac Solenoid
  - "24NC" Option - Normally Closed (energize to open) Main Valve, 24vac Solenoid
  - "24NO" Option - Normally Open (energize to close) Main Valve, 24vac Solenoid
  - "NS" Option\* - Non-Standard Solenoid specify Voltage/Frequency/AC/DC/Operation  
V \_\_\_\_\_ Hz \_\_\_\_\_ AC/DC \_\_\_\_\_ NO/NC \_\_\_\_\_

- Check all that apply
- "F" Option - Atmospheric "Wet" Drain
  - "RV" Option - Pilot Installed on Reverse Side
  - Standard - Liquid Filled Pressure Gauges on Inlet and Reservoir Sensing with Isolation Valves and Reservoir Line Flush Valve

\*Adder to standard price applies

1747 Commerce Way  
Paso Robles, CA 93446  
Phone: 855-663-9876  
Fax: 805-237-7197

Customer Service Representatives available  
Monday through Friday 5:30 a.m. to 5:00 p.m., PST  
Fax completed forms to 805-237-7197, attention: Sales  
Call 855-663-9876, wilkinscs@zurn.com  
or visit us online at www.zurn.com

