

# Model ZW206 - Solenoid Control Valve

## Control Valve Order Form



Customer: \_\_\_\_\_ Date: \_\_\_\_\_

Contact: \_\_\_\_\_ Email: \_\_\_\_\_

Telephone/Fax: \_\_\_\_\_ Ref. P. O. \_\_\_\_\_

### Required Valve Information

Quantity: \_\_\_\_\_

All returns are subject to a restocking/refurbishing fee. Contact Customer Care for details on return policies.

Size: (Check one)  1-1/4"  1-1/2"  2"  2-1/2"  3"  4"  6"  8"  10"  12"  14"  16"

#### Function Options:

- Check all that apply  "C" Option \* - Check Valve with Isolation Valve  
 "L" Option \* - Closing Speed Control (Standard on 6" or larger)  
 "O" Option \* - Opening Speed Control

Valve body is ductile iron, epoxy coated

#### Body Options:

- Check one  Standard - Full Port Globe Body  
 "A" Option - Angle Style Body ( 1-1/4" - 10")  
 "R" Option - Reduced Port Body ( 3" - 10" Flanged Only)

#### End Connections:

- Check one  Standard - ANSI Class 150 Flanges (1-1/2" - 16")  
 "G" Option - IPS Grooved (1-1/2" - 10")  
 "TH" Option - NPT Threaded (1-1/4" - 3")  
 "Y" Option \* - ANSI Class 300 Flanges (1-1/2" - 16")

#### Main Valve Options:

- Check all that apply  Standard - Stainless Steel Seat, Seal Ring Retainer and Stem Guide  
 "V" Option \* - Viton Rubber Internals, Rated 180° (1-1/4" - 6")  
 "Z" Option \* - Visual Position Indicator


#### Pilot Options:

- Check all that apply  Standard - Isolation Valves and "Wye" Type Strainer  
 Standard - Copper Tubing and Brass Fittings  
 "ST" Option \* - Stainless Steel Tubing ("included with SP option, only replaces Copper Tubing")  
 "SP" Option \* - All Stainless Steel Pilotry (replaces all Brass Fittings, Pilot Valve & Copper Tubing". "GL" Option included)  
 "SH" Option \* - Stainless Steel Braided Hoses (only replaces Copper Tubing)

- Check one  "NC" Option - Normally Closed (energize to open) Main Valve, 120vac/60 Hz Solenoid  
 "NO" Option - Normally Open (energize to close) Main Valve, 120vac/60 Hz Solenoid  
 "24NC" Option - Normally Closed (energize to open) Main Valve, 24vac/60 Hz Solenoid  
 "24NO" Option - Normally Open (energize to close) Main Valve, 24vac/60 Hz Solenoid  
 "NS" Option \* - Non-Standard Solenoid (specify Voltage/Frequency/AC/DC/Operation)  
V \_\_\_\_\_ Hz \_\_\_\_\_ AC/DC \_\_\_\_\_ NO/NC \_\_\_\_\_

- Check all that apply  "MO" Option \* - Manual Operator on Solenoid Valve (to control during power failure)  
 "RV" Option - Pilot Installed on Reverse Side

\*Adder to standard price applies

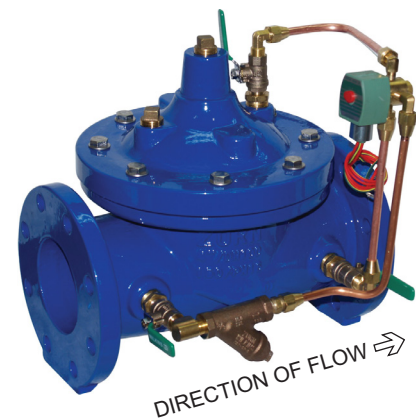

1747 Commerce Way  
Paso Robles, CA 93446  
Phone: 855-663-9876  
Fax: 805-237-7197

Customer Service Representatives available  
Monday through Friday 5:30 a.m. to 5:00 p.m., PST  
Fax completed forms to 805-237-7197, attention: Sales  
Call 855-663-9876, wilkinscs@zurn.com  
or visit us online at www.zurn.com

