

Control Valve Order Form

Customer: _____ Date: _____

Contact: _____ Email: _____

Telephone/Fax: _____ Ref. P. O. _____

Required Valve Information

Quantity: _____

All returns are subject to a restocking/refurbishing fee. Contact Customer Care for details on return policies.

Size: (Check one) 1-1/4" 1-1/2" 2" 2-1/2" 3" 4" 6" 8" 10" 12" 14" 16"


Body Options:

Valve body is ductile iron, epoxy coated

- | | | |
|-----------|-------------------------------------|---|
| Check one | <input type="checkbox"/> Standard | - Full Port Globe Body |
| | <input type="checkbox"/> "A" Option | - Angle Style Body (1-1/4" - 10") |
| | <input type="checkbox"/> "R" Option | - Reduced Port Body (3" - 10" Flanged only) |

End Connections:

- | | | |
|-----------|---------------------------------------|---|
| Check one | <input type="checkbox"/> Standard | - ANSI Class 150 Flanges (1-1/2" - 16") |
| | <input type="checkbox"/> "G" Option | - IPS Grooved (1-1/2" - 10") |
| | <input type="checkbox"/> "TH" Option | - NPT Threaded (1-1/4" - 3") |
| | <input type="checkbox"/> "Y" Option * | - ANSI Class 300 Flanges (1-1/2" - 16") |

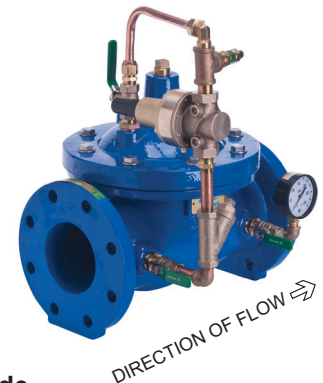

Main Valve Options:

- | | | |
|----------------------|--|---|
| Check all that apply | <input checked="" type="checkbox"/> Standard | - Stainless Steel Seat, Seal Ring Retainer and Stem Guide |
| | <input type="checkbox"/> "V" Option * | - Viton Rubber Internals, Rated 180°F (1-1/4" - 6") |
| | <input type="checkbox"/> "Z" Option * | - Visual Position Indicator |

Pilot Options:

- | | | |
|-----------|--|---|
| Check one | <input checked="" type="checkbox"/> Standard | - Isolation Valves, Inlet Pressure Gauge, and "Wye" Type Strainer |
|-----------|--|---|

- | | | |
|-----------|---------------------------------------|--|
| Check one | <input type="checkbox"/> Standard | - Pressure Relief Pilot (50 - 200 psi) |
| | <input type="checkbox"/> "LP3" Option | - PV-RLF Pilot (5-15 psi) |
| | <input type="checkbox"/> "LP2" Option | - PV-RLF Pilot (10-35 psi) |
| | <input type="checkbox"/> "LP" Option | - PV-RLF Pilot (30-90 psi) |
| | <input type="checkbox"/> "HP" Option* | - PV-RLF Pilot (150-300 psi) |

- | | | |
|----------------------|--|---|
| Check all that apply | <input type="checkbox"/> Standard | - Copper Tubing and Brass Fittings |
| | <input type="checkbox"/> "ST" Option * | - Stainless Steel Tubing (included with SP option, only replaces Copper Tubing) |
| | <input type="checkbox"/> "SP" Option * | - All Stainless Steel Pilotry (replaces all Brass Fittings, Pilot Valve & Copper Tubing. "GL" Option included) |
| | <input type="checkbox"/> "SH" Option * | - Stainless Steel Braided Hoses (replaces Copper Tubing) |

- | | | |
|----------------------|--|-----------------------------------|
| Check all that apply | <input type="checkbox"/> "RV" Option | - Pilot Installed on Reverse Side |
| | <input type="checkbox"/> "GL" Option * | - Liquid Filled Gauge |

*Adder to standard price applied

1747 Commerce Way
Paso Robles, CA 93446
Phone: 855-663-9876
Fax: 805-237-7197

Customer Service Representatives available
Monday through Friday 5:30 a.m. to 5:00 p.m., PST
Fax completed forms to 805-237-7197, attention: Sales
Call 855-663-9876, wilkinscs@zurn.com
or visit us online at www.zurn.com