

MODEL ZW209Q - Pressure Reducing Valve with Downstream Surge Protection

Control Valve Order Form



Customer: _____ Date: _____

Contact: _____ Email: _____

Telephone/Fax: _____ Ref. P. O. _____

Required Valve Information

All returns are subject to a restocking/refurbishing fee. Contact Customer Care for details on return policies.

Quantity: _____

Size: 1-1/4" 1-1/2" 2" 2-1/2" 3" 4" 6" 8" 10" 12" 14" 16"

Function Options:

- Check all that apply
- "C" Option * - Check Valve with Isolation Valve
 - "L" Option * - Closing Speed Control
 - "O" Option * - Opening Speed Control (Standard on 4" or smaller)


Valve body is ductile iron, epoxy coated

Body Options:

- Check one
- Standard - Full Port Globe Body
 - "A" Option - Angle Style Body (1-1/4" - 10")
 - "R" Option - Reduced Port Body (3" - 10" Flanged only)

End Connections:

- Check one
- Standard - ANSI Class 150 Flanges (1-1/2" - 16")
 - "G" Option - IPS Grooved (1-1/2" - 10")
 - "TH" Option - NPT Threaded (1-1/4" - 3")
 - "Y" Option * - ANSI Class 300 Flanges (1-1/2" - 16")

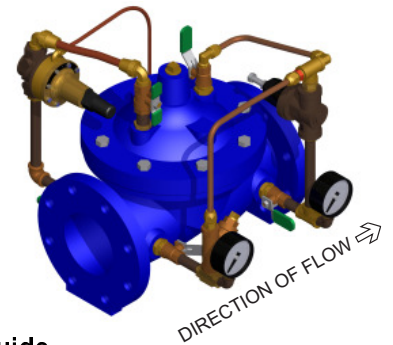

Main Valve Options:

- Check all that apply
- Standard - Stainless Steel Seat, Seal Ring Retainer, and Stem Guide
 - "V" Option * - Viton Rubber Internals, Rated 180°F (only available on 1-1/4" - 4", must combine with "LP" or "HP" Option)
 - "Z" Option * - Visual Position Indicator

Pilot Options:

- Check one
- Standard - Isolation Valves, Inlet and Outlet Pressure Gauges, and "Wye" Type Strainer
-
- Check one
- Standard - PRXL Pilot (15 - 150 psi Pressure Reducing), PV-RLF (35 - 200 psi Surge Protection)
 - "LP" Option * - PV-PRD Pilot (5 - 25 psi Pressure Reducing), PV-RLF (10 - 35 psi Surge Protection)
 - "HP" Option * - PV-PRD Pilot (30 - 300 psi Pressure Reducing), PV-RLF (150 - 300 psi Surge Protection)
-
- Check all that apply
- Standard - Copper Tubing and Brass Fittings
 - "ST" Option * - Stainless Steel Tubing ("included with SP option, only replaces Copper Tubing")
 - "SP" Option * - All Stainless Steel Pilotry (replaces all Brass Fitting, Pilot Valve & Copper Tubing)
 - "SH" Option * - Stainless Steel Braided Hoses (only replaces Copper Tubing)
-
- Check all that apply
- "RV" Option * - Pilots Installed on Reverse Side
 - "GL" Option * - Liquid Filled Pressure Gauge

*Adder to standard price applies

1747 Commerce Way
 Paso Robles, CA 93446
 Phone: 855-663-9876
 Fax: 805-237-7197

Customer Service Representatives available
 Monday through Friday 5:30 a.m. to 5:00 p.m., PST
 Fax completed forms to 805-237-7197, attention: Sales
 Call 855-663-9876, wilkinscs@zurn.com
 or visit us online at www.zurn.com

