

# MODEL ZW205E - Pressure Relief Valve with Solenoid Shut-off Valve



## Control Valve Order Form

Customer: \_\_\_\_\_ Date: \_\_\_\_\_

Contact: \_\_\_\_\_ Email: \_\_\_\_\_

Telephone/Fax: \_\_\_\_\_ Ref. P. O. \_\_\_\_\_

### Required Valve Information

Quantity: \_\_\_\_\_

All returns are subject to a restocking/refurbishing fee.  
Contact Customer Care for details on return policies.

Size: (Check one)  1-1/4"  1-1/2"  2"  2-1/2"  3"  4"  6"  8"  10"  12"  14"  16"

### Function Options:

Valve body is ductile iron, epoxy coated

- Check all that apply  Isolation Valves, Inlet Pressure Gauge, and "Wye" Type Strainer
- "C" Option \* - Check Valve with Isolation Valve
- "L" Option \* - Closing Speed Control (Standard on 4" or smaller)
- "O" Option \* - Opening Speed Control

### Body Options:

- Check one  Full Port Globe Body
- "A" Option \* - Angle Style Body (1-1/4" - 10")
- "R" Option \* - Reduced Port Body (3" - 10" Flanged only)

### End Connections:


- Check one  ANSI Class 150 Flanges (1-1/2" - 16")
- "G" Option - IPS Grooved (1-1/2" - 10")
- "TH" Option - NPT Threaded (1-1/4" - 3")
- "Y" Option \* - ANSI Class 300 Flanges (1-1/2" - 16")

### Main Valve Options:

- Optional  Stainless Steel Seat, Seal Ring Retainer and Stem Guide
- "Z" Option \* - Visual Position Indicator

### Pilot Options:

- Check one  Pressure Relief Pilot (50 - 200 psi)
- "LP3" Option - PV-RLF Pilot (5-15 psi)
- "LP2" Option - PV-RLF Pilot (10-35 psi)
- "LP" Option - PV-RLF Pilot (30-90 psi)
- "HP" Option \* - PV-RLF Pilot (150-300 psi)

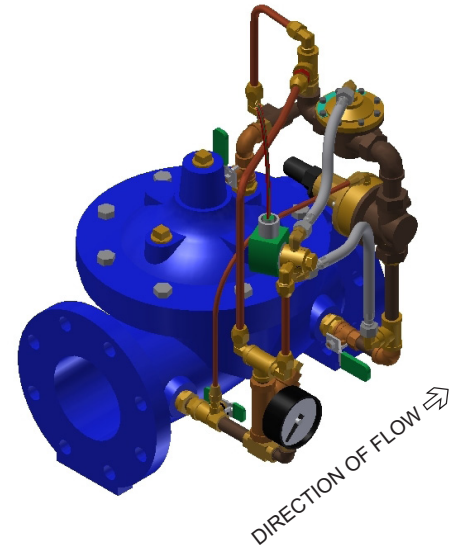

- Check one  Copper Tubing and Brass Fittings
- "ST" Option \* - Stainless Steel Tubing and Fittings, ("included with SP option")
- "SP" Option \* - All Stainless Steel Pilotry (replaces all Brass Fittings & Copper Tubing. "GL" Option included)
- "SH" Option \* - Stainless Steel Braided Hoses (replaces Copper Tubing)

- Check one  "NC" Option - Normally Closed (energize to open) Main Valve, 120vac Solenoid
- "NO" Option - Normally Open (energize to close) Main Valve, 120vac Solenoid
- "24NC" Option - Normally Closed (energize to open) Main Valve, 24vac Solenoid
- "24NO" Option - Normally Open (energize to close) Main Valve, 24vac Solenoid
- "NS" Option \* - Non-Standard Solenoid specify Voltage/Frequency/AC/DC/Operation  
V \_\_\_\_\_ Hz \_\_\_\_\_ AC/DC \_\_\_\_\_ NO/NC \_\_\_\_\_

- Check all that apply  "MO" Option \* - Manual Operator on Solenoid Valve (to control during power failure)
- "RV" Option - Pilot Installed on Reverse Side
- "GL" Option \* - Liquid Filled Gauge

\*Adder to standard price applies

1747 Commerce Way  
Paso Robles, CA 93446  
Phone: 855-663-9876  
Fax: 805-237-7197

Customer Service Representatives available  
Monday through Friday 5:30 a.m. to 5:00 p.m., PST  
Fax completed forms to 805-237-7197, attention: Sales  
Call 855-663-9876, wilkinscs@zurnwilkins.com  
or visit us online at www.zurn.com

