


**EXTRA HEAVY-DUTY
 SHOWER ROD**

**SR100SQ
 SR125SQ**

SR100SQ for 1" (25mm) stainless steel tubing with satin-finish
SR125SQ for 1-1/4" (32mm) stainless steel tubing with satin-finish

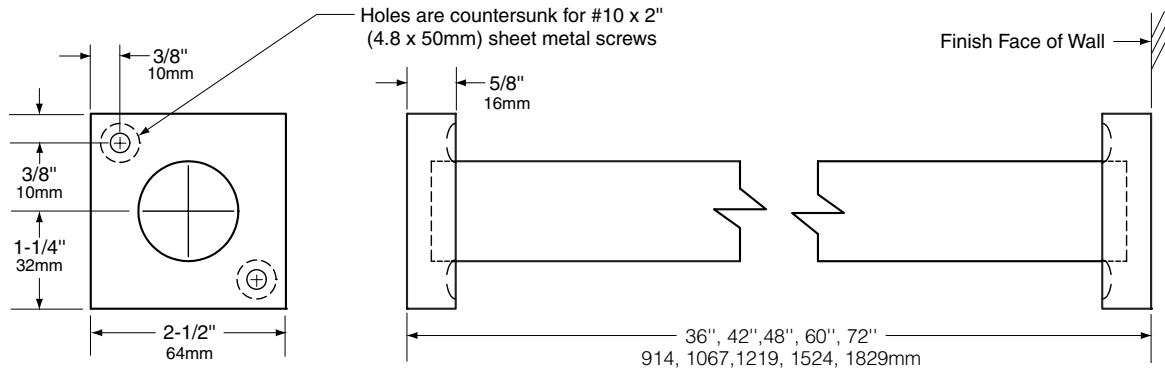

MATERIALS:

Shower Rod - 18-gauge (1.2mm) type 304 stainless steel tubing. Special lengths available up to 96" (2438mm).

Flanges - 22-gauge (.74mm) type 304 stainless steel with satin-finish. One pieced, formed flange.

INSTALLATION:

Slide flanges onto shower rod. Position flanges against wall and secure with #10 x 2" (4.8 x 50mm) Phillips oval head, stainless steel, sheet metal screws and plastic wall anchors, provided by Gamco. Recommend backing behind all mounting surfaces. For plaster or drywall construction, provide backing to comply with local building codes. For other wall surfaces, use expansion shields with sheet metal screws provided, or provide 1/8" (3mm) toggle bolts or expansion bolts.

Extra Heavy-Duty Shower Rod shall be Model _____ (insert model number) of Gamco Commercial Restroom Accessories, A Division of Bobrick, One Gamco Place, Durant, OK