



Barrier-Free Shower Floors

SWANSTONE SHOWER FLOORS

With Fit-Flo™ Drain

Manufactured from Swanstone solid surface
(See page 2 for detailed information.)

WARRANTY
Limited Lifetime – Residential
Limited 10-year – Commercial

Recommended for high-use traffic areas and commercial surfaces.



FEATURES

- Reinforced solid surface means color and texture run all the way through and cannot wear away.
- Will not mold or mildew, no grout to clean.
- Coordinates with Swanstone shower and bath systems.
- “S” pattern molded into floor provides a slip-resistant surface.



| Model | Nominal Size | Rough-In Dimensions | | | |
|---|--------------|---------------------|----------|---------|----------|
| | | 60" | 30" | 8" | 15" |
| SBF-3060L Barrier Free (left drain) | 30" x 60" | 60-3/8" | 30-3/16" | 8-3/16" | 15-3/16" |
| SBF-3060R Barrier Free (right drain) | 30" x 60" | 60-3/8" | 30-3/16" | 8-3/16" | 15-3/16" |

IMPORTANT: Rough-in dimensions are provided for reference only. You must measure the actual shower floor and check local building code requirements before construction of the stud wall. Meets ADA requirements for use in existing bathing facilities but not for new construction.

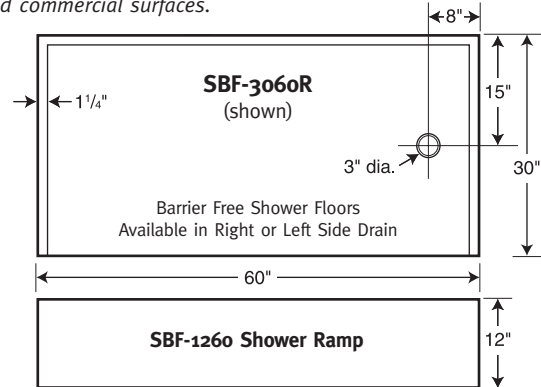

SPECIFICATIONS

Barrier Free Shower Floors With Fit-Flo™ Drain

| Model | Part | Nominal Size Dimensions | Ship Wt. Lb. | Ship FedEx | Carton Dims. In. | Cu. Ft. |
|-----------|-----------|---|--------------|------------|------------------|---------|
| SBF-3060L | SB03060LM | 30" D x 60" W (left drain) (762 mm x 1524 mm) | 64 | - | 66 x 36 x 10 | 14 |
| SBF-3060R | SB03060RM | 30" D x 60" W (right drain) (762 mm x 1524 mm) | 64 | - | 66 x 36 x 10 | 14 |
| BF-1260 | BF01260 | 12" D x 60" W (ramp) (305 mm x 1524 mm) | 25 | FedEx | 66 x 14 x 2 | 1.07 |

Includes: One code-approved compression-molded Swanstone floor with molded-in Fit-Flo drain and installation instructions.

Packaging: Each floor packed in a rectangular carton.

ACCESSORIES

See page 101 for complete listing of all Universal Design accessories.

STANDARDS AND RATINGS

American National Standard Institute—ANSI Z124.1.2

International Association of Plumbing and Mechanical Officials (IAPMO)—Listed

CSA Standard B45.5 by IAPMO

Uniform Plumbing Code (UPC)

For a complete list of tests and results see the Technical Data Sheet – page 175.

SUPPORT DOCUMENTS

Installation instructions available at swanstone.com.



COLORS

(See inside back cover for color sample.)

Solid Colors:

- White (010)
- Bone (037)
- Bisque (018)
- Bright White (137)
- Pearl (138)

Aggregate Colors:

- Acorn (123) 🍂
- Almond Galaxy (046)
- Arctic Granite (035)
- Baby's Breath (168)
- Barley (091)
- Bermuda Sand (040)
- Canyon (124) 🍂
- Caraway Seed (169)
- Cloud Bone (126)
- Cloud White (125)
- Cornflower (063)
- Glacier (121) 🍂

- Golden Steppe (128)
- Gray Granite (042)
- Ice (130)
- Indian Grass (071)
- Mountain Haze (129)
- Night Sky (012)
- Pebble (072)
- Prairie (122) 🍂
- Sierra (094)
- Tahiti Desert (050)
- Tahiti Gray (053)
- Tahiti Ivory (059)
- Tahiti Matrix (058)
- Tahiti Sand (051)
- Tahiti Terra (055)
- Tahiti White (011)
- Tundra (131)
- Winter Wheat (060)

MAINTENANCE AND CLEANING INFORMATION

Clean regularly with common household liquid cleaners and a sponge or soft cloth. For hard water stains, scale removers can be used. If necessary, abrasive cleaners can be used with a nylon brush or pad to remove build up on the shower floor surface. **Do not** use a metal-scouring pad or a wire brush, as it will damage the surface. **Do not** use “leave on” cleaning products, such as automatic spray shower cleaners. Prolonged contact with harsh chemicals could have an adverse reaction over time and discolor surfaces. **Do not** use cleaning agents that caution use on acrylic, polyester or plastics.