TOTO_®

MW614574CUFG

Carlyle[®] II 1G[®] Connect+[™] Toilet, 1.0GPF with Washlet[®] S300e Connect+

FEATURES

- Concealed supply connection for seamless installation
- Ultra high-efficiency Tornado Flush™ (1.0GPF/3.8LPF)
- Skirted design
- CeFiONtectTM glaze prevents debris from sticking to ceramic surfaces for easy cleaning
- Universal Height
- Elongated front bowl
- Decorative one-piece design with high-profile tank
- 12" Rough-in, less supply
- Optional 10"; 14" Uni-fit rough-in
- Chrome trip lever
- See Spec sheet SW574T20 for Washlet features

MODELS

CST614CUFGT20
 With CeFiONtect ceramic glaze

REQUIRED WASHLET CONNECT+

• SW574T20 Washlet® S350e Connect+ Fits TOTO Connect+ toilet bowl models only

COLORS/FINISHES

Standard #01 Cotton

OPTIONAL ROUGH-IN

10" rough-in TSU01W.10R
 14" rough-in TSU01W.14R

PRODUCT SPECIFICATION

The one-piece ultra high-efficiency Tornado Flush toilet shall be 1.0GPF/3.8LPF.

Universal Height Toilet with CeFiONtect glaze finish. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever.

Toilet shall be TOTO Model CST614CUFGT20#01.

See TOTO Specification sheet **SW574T20** for details on required Washlet.



CeFiONtect CONNECT

Tornado Flush _ewater+_

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts , City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)









MW614574CUFG

Carlyle[®] II 1G[®] Connect+[™] Toilet, 1.0GPF with Washlet[®] S300e Connect+

SPECIFICATIONS

Water Use
 Flush System
 Min. Water Pressure
 Water Surface
 Trap Diameter
 1.0 GPF/3.8LPF
 Tornado Flush™
 8 psi (flowing)
 6-7/8" x 9-3/4"
 2-1/8"

Irap Diameter 2-1/8"
 Rough-in 12"
 Trap Seal 2-1/8"

• Warranty One Year Limited Warranty

• Material Vitreous china

 Shipping Weight CST614CUFGT20 110lbs SW574T20 13.5lbs.

Shipping Dimensions CST614CUFGT20

 $32"L \times 20"W \times 17-3/4" H^{1} \times$

28-3/4" H² SW574T20


23"X 19-1/4" X 5-1/2"


See Spec sheet SW574T20 for Washlet details

INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

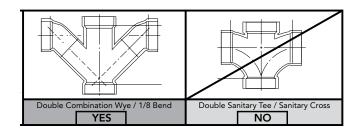

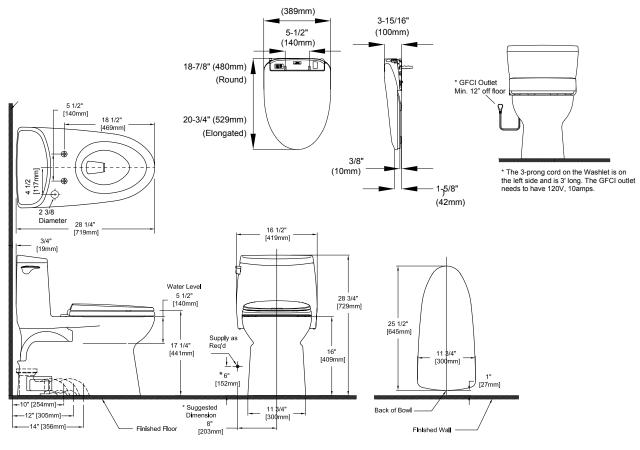

TOTO®

These dimensions and specifications are subject to change without notice