

MW6142034CUFG

Carlyle[®] II 1G[®] Connect+[™] Toilet, 1.0GPF with Washlet[®] C100 Connect+

FEATURES

- Concealed supply connection for seamless installation
- Ultra high-efficiency Tornado Flush™ (1.0GPF/3.8LPF)
- Skirted design
- CeFiONtect[™] glaze prevents debris from sticking to ceramic surfaces for easy cleaning
- Universal Height
- Elongated front bowl
- Decorative one-piece design with high-profile tank
- 12" Rough-in, less supply
- Optional 10"; 14" Uni-fit rough-in
- Chrome trip lever
- See Spec sheet SW2034T20 for Washlet features

MODELS

• CST614CUFGT20 With CeFiONtect ceramic glaze

REQUIRED CONNECT+ WASHLET

• SW2034T20 Connect+ Washlet[®] C100 Fits TOTO Connect+ toilet bowl models only

COLORS/FINISHES

• Standard #01 Cotton

OPTIONAL ROUGH-IN

- 10" rough-in TSU01W.10R
 - 14" rough-in TSU01W.14R

PRODUCT SPECIFICATION

The one-piece ultra high-efficiency Tornado Flush toilet shall be 1.0GPF/3.8LPF.

Universal Height Toilet with CeFiONtect glaze finish. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever.

Toilet shall be TOTO Model CST614CUFGT20#01.

See TOTO Specification sheet **SW2034T20** for details on required Washlet.



CeFiONtect CONNECt Tornado Flush

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts , City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)



MW6142034CUFG

Carlyle[®] II 1G[®] Connect+[™] Toilet, 1.0GPF with Washlet[®] C100 Connect+

SPECIFICATIONS

- 1.0 GPF/3.8LPF Water Use
- Flush System .

Tornado Flush™

- Min. Water Pressure 8 psi (flowing)
- Water Surface 6-7/8" x 9-3/4" 2-1/8"
- Trap Diameter
- Rough-in •
- Trap Seal 2-1/8"
- Warranty One Year Limited Warranty .


12"


- Material
- Vitreous china Shipping Weight CST614CUFGT20 110lbs
- SW2034T20 16.0lbs.
- Shipping Dimensions CST614CUFGT20 32"L x 20"W x 17-3/4" H¹ x 28-3/4" H² SW2034T20 23" 1/2"X 20 1/2" X 9"
- See Spec sheet SW2034T20 for Washlet details

INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

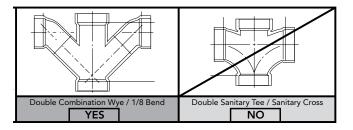

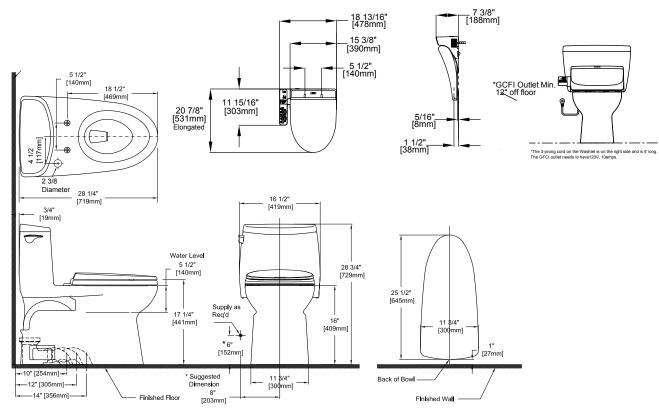

TOTO

These dimensions and specifications are subject to change without notice